
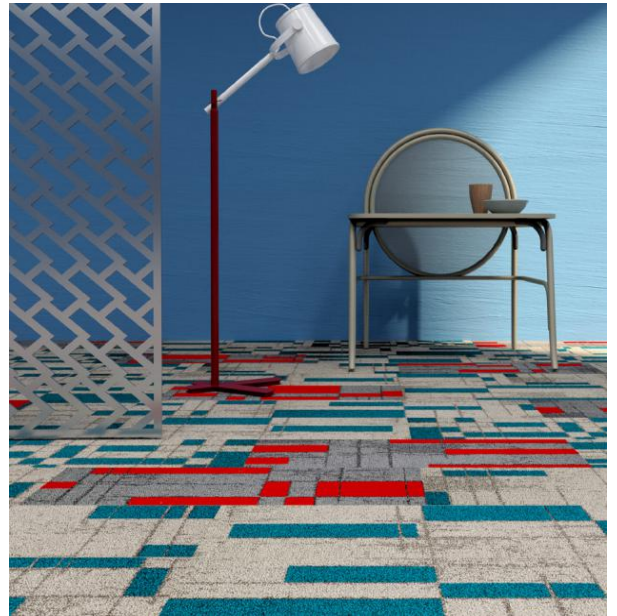


VOXFLOOR®


Technical Specifications

| | |
|---------------------|-------------------------|
| Style Name | Mondrian 300 |
| Construction | Colordot |
| Fiber | Voxflor Certified Nylon |
| Gauge | 1/10" |
| Stitches | 10 per inch |
| Pile Weight | 26 OZ/yd ² |
| Average Pile Height | 4 mm±0.5 mm |
| Backing | PVC with fiberglass |
| Tile Size | 25cm*100cm |
| Anti-microbial | Ultra-Fresh (Available) |
| Installation Method | |



Performance Specifications

| | Test Code | Standard | Test Results |
|---------------------------|-----------------|------------------------------------------|---------------|
| Flammability Tests | | | |
| Radiant Panel | ASTM E 648 | ≥45 watt/cm | Class I |
| Methenamine Pill | ASTM D2859 | 7 out of 8 | 8 |
| Smoke Density | ASTM E 662 | ≤ 450 DMC | ≤ 450 |
| Stability | | | |
| Delamination | ASTM D3936 | ≥ 3.0 lbc/in | No Separation |
| Dimensional Stability | AACHEN | ≤ 0.2% | ≤ 0.2% |
| Tuft Bind | ASTM D1335 | ≥ 8.0 lbs | ≥ 8.0 lbs |
| Anti-Static | | | |
| Static Propensity | AATCC 134 | ≤ 3.5 kV | ≤ 3.5 kV |
| Colour Fastness | | | |
| Light | AATCC 16 E | ≥ 4-5 | 4-5 |
| Rubbing/Crocking | AATCC 165 | ≥ 4-5 | 4-5 |
| Wear Tests | | | |
| Castor Chair | BS EN 985 | r ≥ 2.4 | r = 2.8 |
| Hexapod Drum | ASTM D5252 | ≥ 3-4 | 3 |
| Generic Tests | | | |
| Green Carpet(VOC) | CRI Green Label | GLP 6331 [#] /6332 [#] | Accredited |
| Acoustic-Nylon | BS EN ISO 354 | Absorption Coefficient-NRC | aw =0.15(H) |



Declare.